






- NOTES: 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
 2. RESISTOR WATTAGES ARE 1/10W [100S] UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 1000PF) OR [B] (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.
 5. CHIP CAPACITORS TYPE ARE [100S] AND RATED 50V UNLESS OTHERWISE NOTED.
 6. RESISTOR TOLERANCES ARE J UNLESS OTHERWISE NOTED.

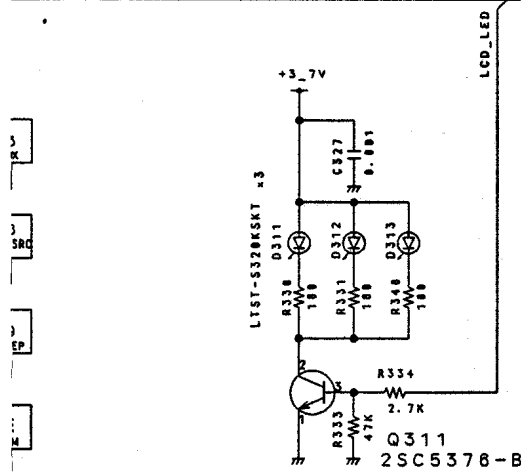

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
'04/11/08	'04/11/18	UB324C	AE92H
KUROKI	KUROKI	TITLE MAIN ASS'Y SCHEMATIC DIAGRAM	
CHECK BY	APPROV BY	DRAWING No.	
REV. No		UNIDEN CORP.	

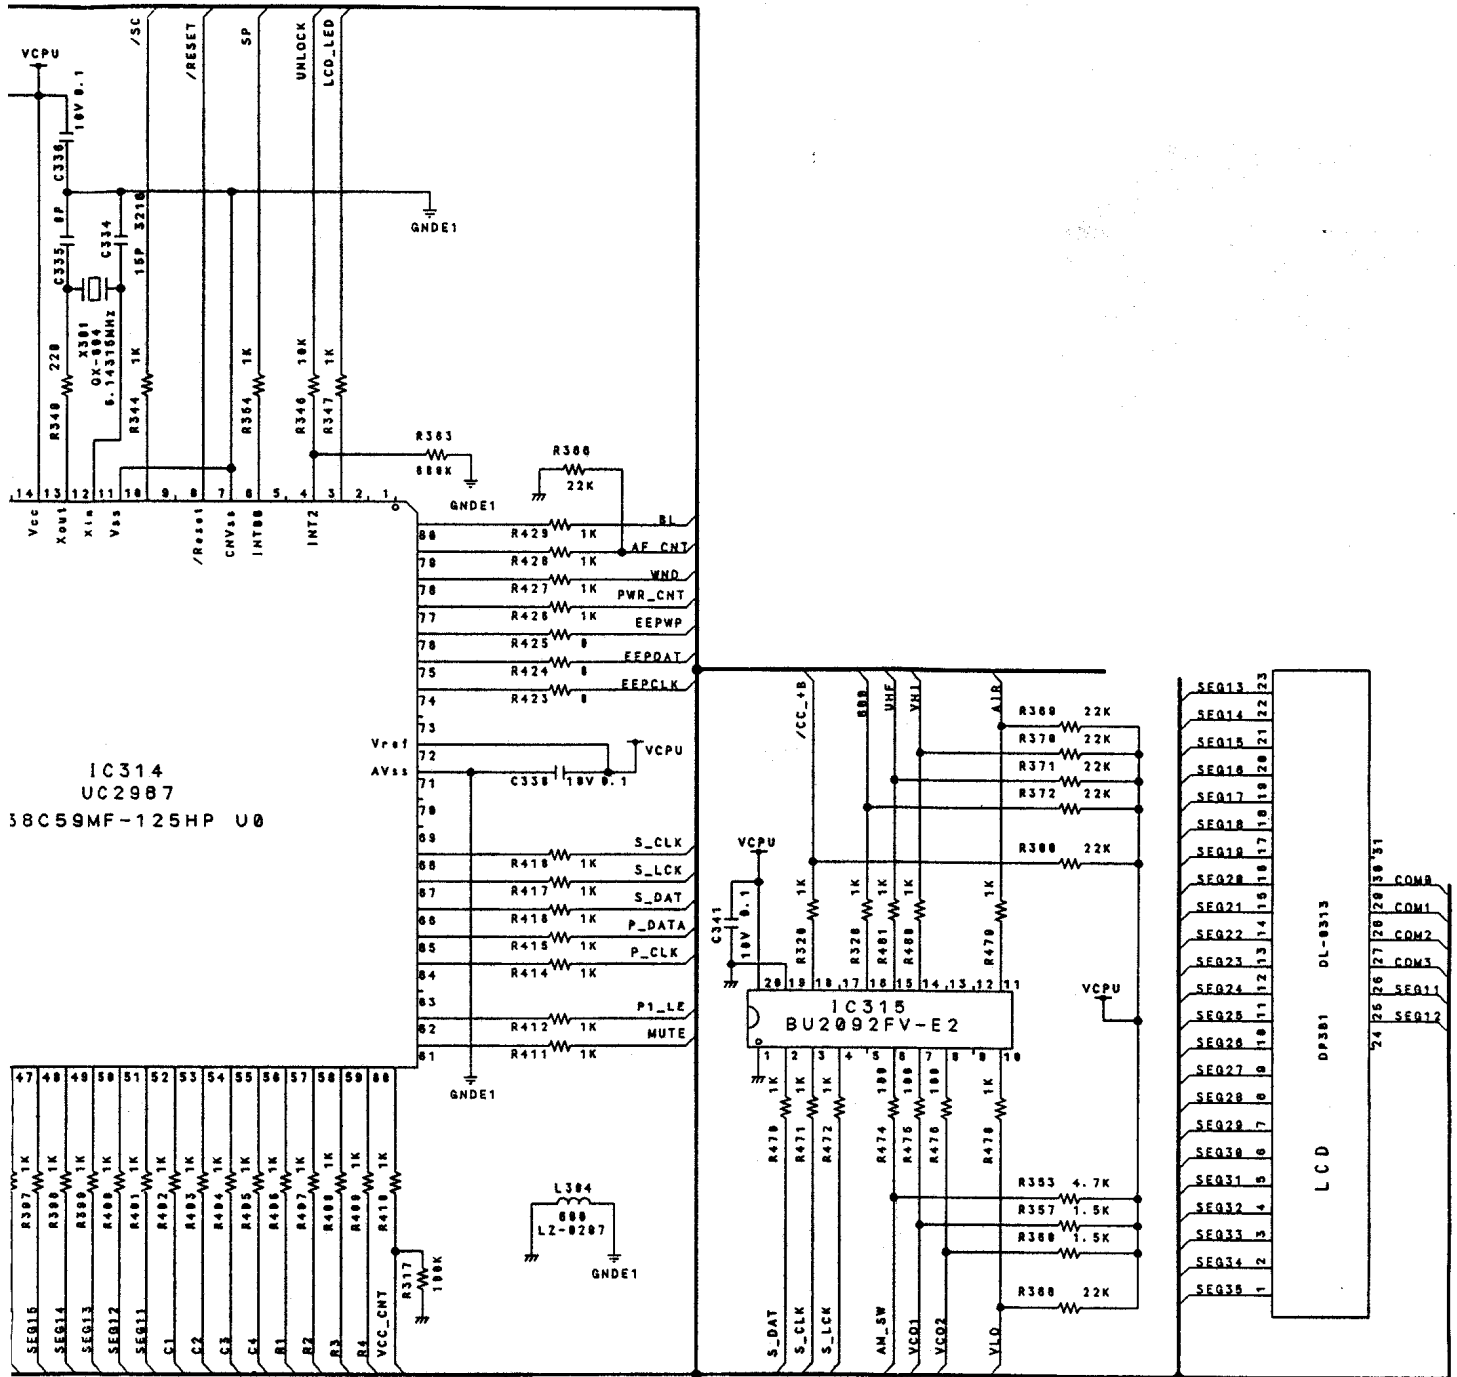

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K-KILO OHM, M-MEG OHM)
 2. RESISTOR WATTAGES ARE 1/10W [1005] UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO F UNLESS OTHERWISE NOTED. (P-MICRO-MICRO FAR ARE [CH] (LESS THAN 1000PF) OR [B] (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 1000PF) OR [B] (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.
 5. ALL CAPACITORS ARE RATED 50V UNLESS OTHERWISE NOTED.
 6. CHIP CAPACITORS TYPE ARE [1005] UNLESS OTHERWISE NOTED.
 7. RESISTOR TOLERANCES ARE J UNLESS OTHERWISE NOTED.

DESIGN	DRAWN BY	UNIDEN No.	MOD
'84/11/B	'84/11/18	UB324C	AE
KUROKI	KUROKI	TITLE KEY AS:	
CHECK BY	APPRO BY	SCHEMATIC I	
		DRAWING No.	
REV. No.		UNIDEN CC	