

# PRESIDENT

Happy Birthday

Mister PRESIDENT...



new




JFK II ... times better !

Groupe  
**PRESIDENT**  
ELECTRONICS

S.A. Capital 5.000.000 €  
Siège Social / Head Office – France – Route de Sète – BP 100  
34540 BALARUC  
Site Internet : <http://www.president-electronics.com>  
e-mail : [groupe@president-electronics.com](mailto:groupe@president-electronics.com)  
0918/08-08 C0157



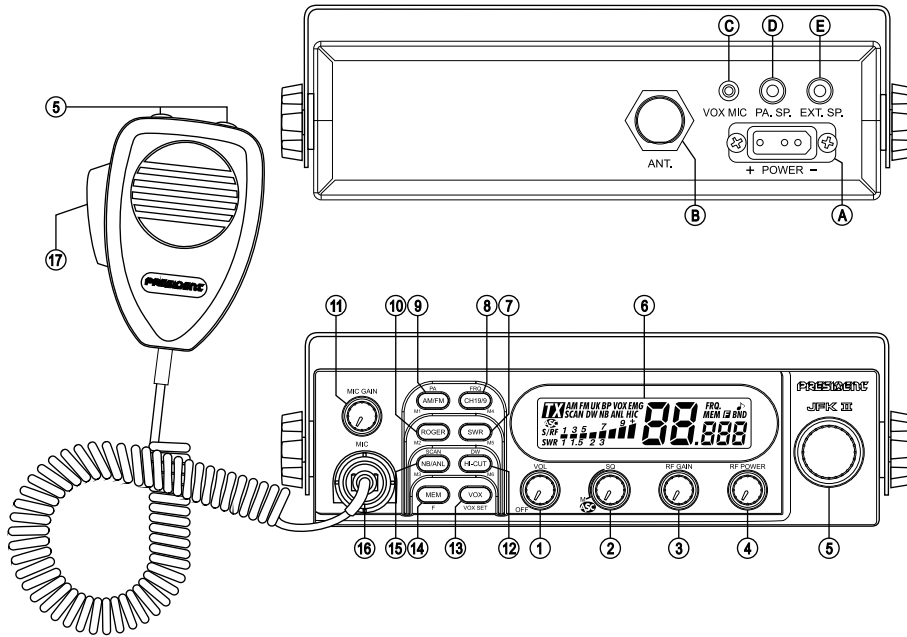

- ✓ Roger Beep
- ✓ Scan
- ✓ Dual Watch
- ✓ 6 memories
- ✓ Vox built-in
- ✓ All european standards
- ✓ Frequencies
- ✓ ...

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1) ON/OFF – VOLUME</li> <li>2) ASC (Automatic Squelch Control) / SQUELCH</li> <li>3) RF GAIN</li> <li>4) RF POWER</li> <li>5) CHANNEL SELECTOR: rotary knob and UP/DN keys of the microphone</li> <li>6) DISPLAY</li> <li>7) SWR ~ M5</li> <li>8) CH 19/9 ~ FRQ ~ M4</li> <li>9) MODE SELECTOR AM/FM ~ PA ~ M1</li> <li>10) ROGER ~ M2</li> <li>11) MIC GAIN</li> </ul> | <ul style="list-style-type: none"> <li>12) HI-CUT ~ DW ~ M6</li> <li>13) VOX ~ VOX SET</li> <li>14) MEM ~ F</li> <li>15) NB/ANL ~ SCAN ~ M3</li> <li>16) 6 PIN MICROPHONE PLUG</li> <li>17) PTT</li> <li>A) POWER SUPPLY (13.2V)</li> <li>B) ANTENNA CONNECTOR (SO-239)</li> <li>C) JACK FOR OPTIONAL VOX MIKE (2.2 K<math>\Omega</math> Electret, <math>\varnothing</math> 2.5 mm)</li> <li>D) JACK FOR LOUDSPEAKER PUBLIC ADDRESS (8 <math>\Omega</math>, <math>\varnothing</math> 3.5 mm)</li> <li>E) JACK FOR EXTERNAL LOUDSPEAKER (8 <math>\Omega</math>, <math>\varnothing</math> 3.5 mm)</li> </ul> |
|--|--|

0919/08-08 C0157b

## 1) GENERAL:

- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (in mm) : 180 (W) x 188 (D) x 51 (H)
- Weight : 1.5 kg
- Accessories supplied : microphone UP/DOWN with mounting cradle, screws and fused power cord.

## 2) TRANSMISSION:

- Frequency allowance : +/- 300 Hz
- Carrier power : 1 W AM / 4 W FM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz in AM/FM
- Emitted power in the adjacent channel : inferior to 20  $\mu$ W
- Microphone sensitivity : 3.0 mV
- Drain : 3 A (with modulation)
- Modulated signal distortion : 2 %

## 3) RECEPTION:

- Maxi. sensitivity at 20 dB sinad : 0.7  $\mu$ V - 110 dBm (AM/FM)
- Frequency response : 300 Hz to 3 kHz in AM/FM
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : minimum 0.2  $\mu$ V - 120 dBm  
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rej. rate : 70 dB
- Drain : 0.4 A nominal / 1.5 A max.

# Specifications



all european standards

